




EAN code
GRT3-50/B: 8595188156301
GRT3-50/W: 8595188156349

| Technical parameters | GRT3-50 |
|--|--|
| Inputs | |
| Temperature measuring: | YES, built-in temperature sensor |
| Scope and accuracy of temp. measurement: | 0.. +55°C; 0.3°C from the range |
| Humidity measurement: | YES |
| Humidity measurement range: | 0 to 99% RH |
| Humidity measurement accuracy: | ± 3 % Relative humidity |
| Inputs: | 2x AIN/DIN |
| Resolution: | by setting 10-bit |
| External temperature sensor: | YES, the connection between AIN1/DIN1 and AIN2/DIN2 |
| Type of external sensor: | TC/TZ |
| Temperature measurement range: | -20°C to +120°C |
| Temperature measurement accuracy: | 0.5°C from the range |
| Buttons | |
| Number of control buttons: | 5 |
| Type: | Capacitive |
| Indication: | Coloured illuminated symbol |
| Display | |
| Display: | colored TFT, 20 x 25.5 mm |
| Resolution: | 240 x 240 pixels |
| Outputs | |
| Acoustic output: | piezo-changer |
| Tactile output: | Vibration motor |
| Communication | |
| Installation BUS: | BUS |
| Power supply | |
| Supply voltage / tolerance: | 27 V DC, -20 / +10 % |
| Dissipated power: | 0.5 W |
| Rated current: | 85 mA (at 27V DC), from BUS |
| Connection | |
| Terminals: | 0.5 - 1 mm ² |
| Operating conditions | |
| Relative humidity: | max. 80 % |
| Operating temperature: | -20 .. +55 °C |
| Storing temperature: | -30 .. +70 °C |
| Protection degree: | IP20 |
| Overvoltage category: | II. |
| Pollution degree: | 2 |
| Operation position: | any |
| Installation: | on the wall, observing the conditions for correct installation of the thermostat |
| Dimensions and weight | |
| Dimensions: | 94 x 94 x 36 mm |
| Weight: | 156 g |

- Glass room thermo-regulator GRT3-50 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS) and serves to regulate the temperature in the room.
- GRT3-50 thermo-regulator has a display for displaying the current room temperature and desired temperature. To adjust the required temperature, it is possible to use the touch buttons with symbols "-" and "+".
- GRT3-50 is also suitable for controlling fan coils and fan speed can be easily adjusted by using the touch buttons with symbols.
- Thermo-regulator GRT3-50 also has a further two touch buttons whose function can be adjusted by software, for example fan coil on/off, heating/cooling or comfort temperature for heating or cooling.
- Thermo-regulator is equipped with an integrated temperature sensor for ambient temperature measurement.
- The glass room thermo-regulator is a design component of the iNELS system and is available in elegant black (GRT3-50/B) and white (GRT3-50/W) version.
- Printing is possible to customize to the investor requirements.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GRT3-50 are designed for mounting into an installation box.

Connection

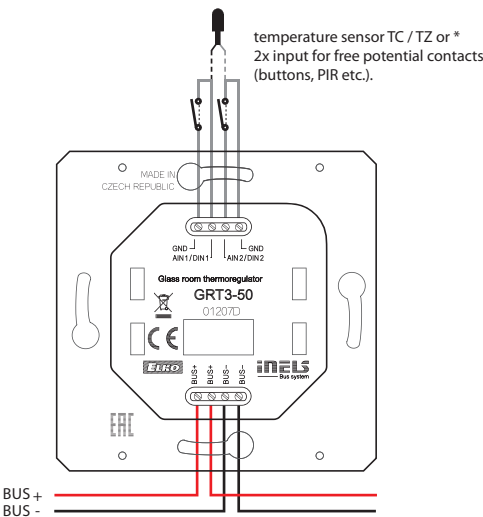

* The choice is made in iDM3 for each unit separately.