





EAN code
PS3-100/iNELS: 8595188131568

Indication LED


switching power supply works correctly
output voltage 27V is correct ($U_{OUT} > 24V$)
output voltage 12V is correct
batteries are not recharged




switching power supply not working correctly
- UPS mode
output voltage 27V is correct ($U_{OUT} > 24V$)
output voltage 12V is correct
batteries are not recharged




switching power supply works correctly
output voltage 27V is correct ($U_{OUT} > 24V$)
output voltage 12V is correct
batteries are recharged




switching power supply not working correctly
- UPS mode
low output voltage 27V ($21V < U_{OUT} < 24V$)
output voltage 12V is correct
batteries are not recharged




switching power supply works correctly
low output voltage 27V ($21V < U_{OUT} < 24V$)
output voltage 12V is correct
batteries are not recharged



switching power supply works correctly
output voltage 27V is correct ($U_{OUT} > 24V$)
low output voltage 12V (short-circuit, overload)
batteries are recharged




switching power supply is overload
low output voltage 27V ($U_{OUT} < 21V$)
low output voltage 12V
batteries are not recharged



- PS3-100/iNELS is a stabilized switching power supply, with the total power of 100 W.
- Used to supply central units and external master within intelligent electro-installation iNELS.
- Through BUS separators from the supply voltage BPS3-01M and BPS3-02M, it supplies supplies BUS lines from which iNELS peripheral units are also powered.
- Used in the instrumentation field.
- Fixed output voltage DC 27.6 V and DC 12.2 V, galvanically isolated from the mains.
- Power source of 27 V and 12 V have a common ground terminal GND.
- Electronic short circuit protection, high-capacity and thermal overload, over voltage.
- UPS functions - backup of output 24V and 12V on connected batteries.
- Recharging the batteries from 27 V source.
- Protection battery backup fuse - protection against short circuit and reverse polarity battery.
- Continuously adjustable maximum battery charging current.
- Indication of operating and fault conditions 6 LED diodes on the front panel of the power supply.
- 2 STATUS outputs with open collector for reporting operational status of the source.
- Source supplies power to the priority system iNELS, the remaining power is used for rechargeable batteries.
- When the battery is fully discharged, the battery is automatically disconnected from the load.
- PS3-100/iNELS in 6-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Example of connection

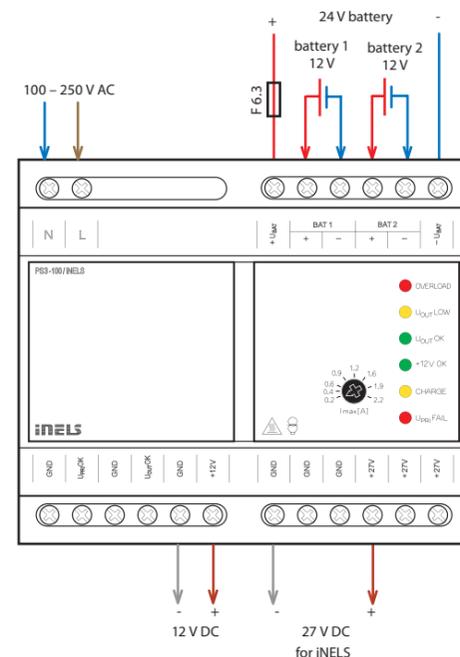

| Technical parameters | PS3-100/iNELS |
|--|---|
| AC Input | |
| Power supply: | 100 - 250 V AC / 50 - 60 Hz |
| Dissipated power: | 20 W |
| Power load (apparent / active): | max. 13 VA / 2 W |
| Power consumption at max. load (apparent / active): | max. 180 VA / 111 W |
| Protection: | - safety fuse T3.15 A inside the unit - electronic protection (short circuit current and thermal overload) |
| DC Input | |
| Power supply: | DC 24 V (two 12V batteries in series) |
| Protection: | - safety fuse F6.3 A external - electronic protection against current overload |
| Terminals for connecting the battery: | - each battery separately - separately routed extreme terminals (24) |
| Automatic disconnect the battery: | - for the battery voltage < 21 V - when exceeding discharge current 4.2 A |
| Outputs | |
| Output voltage 1: | 27.6 V |
| Max. capacity: | 3.6 A |
| Output voltage 2: | 12.2 V |
| Max. capacity: | 0.35 A |
| The overall efficiency of resources: | about 88 % |
| Time delay after connecting to the AC network: | max 1 s |
| Max. charging current: | adjustable from 0.2 to 2.2 A |
| LED Signalization | |
| Output voltage 27 V OK ($U_{OUT} > 24 V$): | green LED $U_{OUT} OK$ |
| Switch. power supply does not work (does not oscillate): | flashing red LED $U_{PRI} FAIL$ (if a battery is connected) |
| Low output voltage ($21 V < U_{OUT} < 24 V$): | yellow LED $U_{OUT} LOW$ |
| Output voltage 12 V OK ($U > 11 V$): | green LED + 12 V OK |
| Overloading the power supply ($U_{OUT} < 21 V$): | red LED OVERLOAD |
| Charging the battery (charging current > 50mA): | yellow LED CHARGE |
| Output status | |
| STATUS output 1 ($U_{PRI} OK$): | closed, when power supply works (not blinking LED $U_{PRI} FAIL$) |
| STATUS output 2 ($U_{OUT} OK$): | closed, if $U_{OUT} > 21 V$ (not lit red LED OVERLOAD) |
| Output type: | open collector current limited |
| Max. connectable voltage: | 50 V DC |
| Max. current output: | 50 mA |
| Voltage drop on the switch max: | at 10 mA ... 140 mV at 30 mA ... 400 mV at 50 mA ... 700 mV |
| Other Data | |
| Electric strength AC input - output: | 4 kV |
| The connection terminals: | row |
| Cable size (mm ²): | max. 1 x 2.5, max. 2 x 1.5 (with sleeve max 1 x 1.5) |
| Operating temperature: | -20 °C ... +55 °C |
| Storage temperature: | -30 °C ... +70 °C |
| Working humidity: | 20 ... 90 % RH |
| Cover: | IP20 device, IP40 mounting in the switchboard |
| Overvoltage category: | III. |
| Degree of pollution: | 2 |
| Working position: | arbitrary, vertical is optimum |
| Installation: | on the DIN rail EN60715 |
| Execution: | 6-MODULE |
| Dimensions: | 90 x 105 x 65 mm |
| Weight: | 401 g |
| Related standards: | general: EN61204, safety: EN61204-7, EMC: EN61204-3 |

Description of device functions

- The device consists of several functional blocks.
- The basic part is 100 W power supply with 2 output voltage levels.
 - Voltage of 27.6 V is used to supply the system iNELS and to recharge the batteries.
 - Voltage of 12.2 V is for power as intrusion detectors (ESAS) or EFAS.
 - Both voltages are available without interruption during power AC power supply (UPS function) - assuming they are connected to a backup battery.
- Other parts of the source circuits are battery backup and recharge, which provide switching mode connection, charging and disconnecting the battery.
 - When in the backup mode, the battery is completely discharged, the circuit is immediately switched off to avoid deep discharge. The maximum discharge current is also guarded - when exceeded, the batteries are again disconnected.
 - If the switched source is working (oscillating), and its output voltage are greater than 26.9 V, the backup batters are charged by the current, and the maximum value is set by trimmer on the panel source.
 - When charging the yellow LED CHARGE illuminates. The source first feeds the iNELS system, and the remaining capacity of up to 100 W only recharges the battery.
 - If the output is high, this disconnects the charge (the yellow LED CHARGE switches off).
 - Upon further increasing, the load further decreases the voltage source and the load current also flows from the battery (power supply and battery power to the load together).
 - If the source is disconnected from the AC network (does not oscillate), and you connect batteries now, the batters remain disconnected and power outputs are without power. To activate, the source must be connected to the power supply.
- The last part of the unit are signaling circuits and status outputs.
 - STATUS outputs (see technical data) are equipped with current limiting, so they can switch signaling components directly without external resistors (e.g. LED, optocouplers or relay coil)
 - The LED signaling function is given in the table of technical parameters and illustratively described in seven case studies.