

4K H.265 Pro NVR 5000 Series



MS-N5008-UC/MS-N5008-UT/MS-N5016-UT


[DATASHEET](#)

KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 8*1080P or 16*720P for Milesight Pro NVR 5000 Series.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **2*3.5"HDD** (2 SATA of 3.5"HDD, providing 10TB capacity for each HDD, up to 20TB total hard disk storage.)
- ▶ **Video Content Analysis** (With 10 detection modes, VCA greatly enhances the performance bringing comprehensive surveillance functions.)
- ▶ **ANR** (Can automatically replenish the recording gap due to internet interruptions(by storing at the edge).)

H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording time with H.265 than with other compressions.

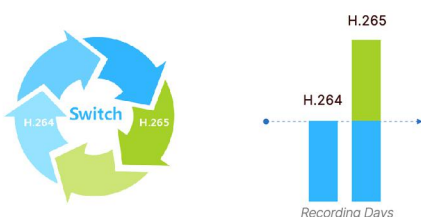

4K Video Viewing Experience

Milesight 4K H.265 Pro NVR 5000 Series supports up to 4K definition (3840*2160, effectively four times that of Full HD) live viewing, playback and recording, providing users with ultra-high-definition video viewing experience.



Powerful Decoding Capacity

Maximum supporting 4*1080P or 8*720P for MS-N5008-UC, 8*1080P or 8*720P for MS-N5008-UT, 8*1080P or 16*720P for MS-N5016-UT.



Remote Access

Milesight 4K H.265 Pro NVR 5000 Series can be easily accessed and managed remotely via Milesight CMS and mobile APP.



4K H.265 Pro NVR 5000 Series




Model			MS-N5008-UC	MS-N5008-UT	MS-N5016-UT
Video/Audio Input	Network Video Input		8-CH		16-CH
	Bandwidth	Incoming	80Mbps		160Mbps
		Outgoing	80Mbps		160Mbps
Video/Audio Output	HDMI Output		1-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output		
	VGA Output		1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz		
	Dual Stream		Support		
	Recording Resolution		8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF		
	Synchronous Playback		1*(30fps @8MP), 1*(30fps @6MP), 1*(30fps @5MP), 2*(30fps @4MP), 2*(30fps @3MP), 4*(30fps @1080P), 8*(30fps @720P)	2*(30fps @8MP), 2*(30fps @6MP), 3*(30fps @5MP), 4*(30fps @4MP), 5*(30fps @3MP), 8*(30fps @1080P), 8*(30fps @720P)	2*(30fps @8MP), 2*(30fps @6MP), 3*(30fps @5MP), 4*(30fps @4MP), 5*(30fps @3MP), 8*(30fps @1080P), 16*(30fps @720P)
Video/Audio Compression	Video Compression		H.265+/H.265(HEVC)/H.264+/H.264		
	Audio Compression		G.711/AAC/G.722/G.726		
	Sample Rate		8KHz/16KHz		
	Synchronous Recording		8*5MP		16*5MP
Storage	SATA		2*SATA HDD(3.5")		
	Capacity		Up to 10TB capacity for each HDD		
Recording Management	Recording Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)		
	Snapshot Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)		
	Playback Type		General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback		
Backup	Backup		Video Backup, Image Backup		
Network	Protocol		IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS		
External Interface	Network Interface		1*RJ45 10/100/1000Mbps		
	USB Interface		2*USB 2.0	1*USB 3.0; 2*USB 2.0	
	Audio Input/Output		1*RCA /1*RCA	— /1*RCA	
	Alarm Input/Output		4-CH/1-CH		
General	Compatibility		ONVIF, API		
	Advanced Function		ANR		
	ANPR		Support		
	Video Analysis		Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed		
	Keyboard Control		Milesight Keyboard (MS-K01)		
	Power Supply		DC 12V 50Hz~60Hz		
	Consumption		≤3W(Without HDD)	≤10W(Without HDD)	
	Working Conditions		Temperature: -10℃~55℃/Humidity: 10%~90%		
	Dimensions		Rack Mountable Chassis (1.0U Standard) 380mm(W)X317.6mm(D)X51.8mm(H)	Rack Mountable Chassis (1.0U Standard) 440mm(W)X251mm(D)X44.4mm(H)	
	Weight		1.9Kg	2.6Kg	
	Warranty		3/5 Years		

4K H.265 Pro NVR 5000 Series




Interfaces

MS-N5008-UC

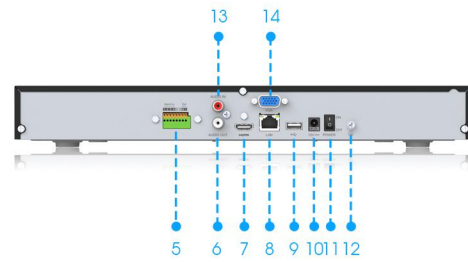

1. Run Indicator 2. HDD Indicator 3. Power Indicator 4. USB 5. Alarm In/Out 6. Audio Out 7. HDMI
8. Ethernet Port 9. USB 10. Power 11. Power Button 12. GND 13. Audio In 14. VGA


MS-N5008-UT/MS-N5016-UT

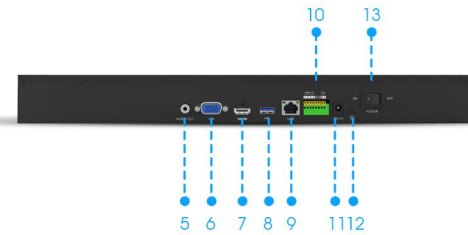


1. Run Indicator 2. HDD Indicator 3. Power Indicator 4. USB 5. Audio Out 6. VGA 7. HDMI 8. USB
9. Ethernet Port 10. Alarm In/Out 11. Power 12. GND 13. Power Button

Structure Diagrams

MS-N5008-UC

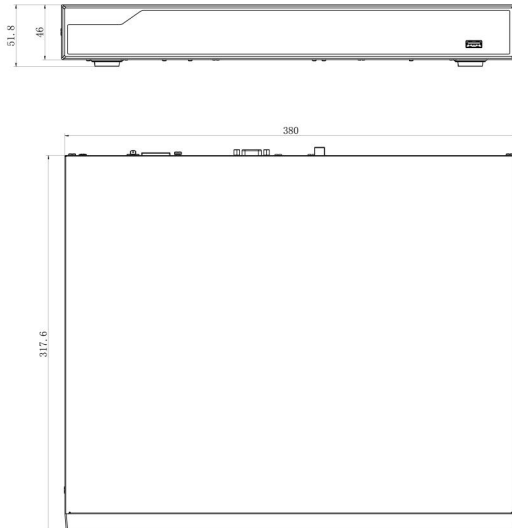

MS-N5008-UT/MS-N5016-UT

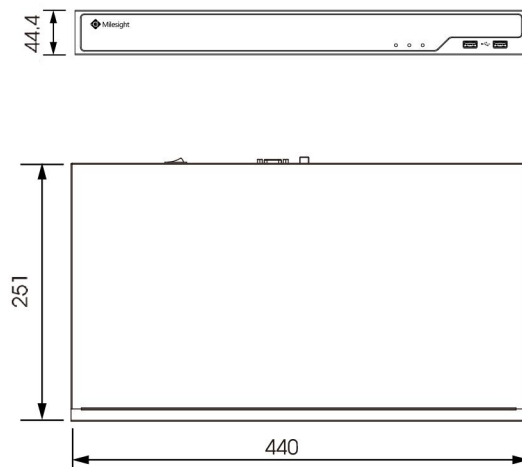

Units: mm

Naming Convention



Mlesight Technology Co., Ltd. | www.mlesight.com

Contact Us: sales@mlesight.com support@mlesight.com

Add: 220 NE 51st Street, Oakland
Park, Florida 33334, USA
Tel: +1-800-561-0485

Add: 925, Anyang SK V1 Center, LS-ro
116beon-gil, Dongan-gu, Anyang-si, Korea
Tel: +82-31-990-7732

Add: No.23 Wanghai Road,
2nd Software Park, Xiamen, China
Tel: +86-592-5922772

